



Product model: HPM410LR Lower Power Consumption Level Transmitter

Manufacturer: Nanjing Hangjia Electronic Technology Co., LTD.

Product Category: Level Transmitter

Application: IoT, Water Treatment

Industry, Groundwater, rivers, lakes, Ship

Overview

HPM410LR low power consumption level transmitter uses high quality stable pressure sensor as the measurement element, it measures the static level pressure accurately which has direct ratio with liquid depth. Then converting the measurement value into standard RS485 signal through the signal conditioning circuit to achieve the measurement of liquid depth. This product has extremely low power consumption and long service life, it can use lithium-ion battery as power supply. And can connect wireless module, implement data wireless transport.

With long-term aging and stability testing, the product is suitable for harsh outdoor environment and can be widely used for groundwater, rivers, lakes, surface water tanks, and inventory water tanks. It is also suitable for kinds of level measurement in IoT.


Feature

- ◆ Low Power Consumption
- ◆ Easy adapted with wireless module
- ◆ Can equip lithium battery outside as supply.
- ◆ Common regular profile, easy to install.
- ◆ Special Anti-condensation design
- ◆ Customized requests supported.

Technical Parameters

Level Range	0~0.5~500mH ₂ O Notes: Can also use mH ₂ O、inH ₂ O、m、mm, etc. as unit Need to highlight the density of liquid to be measured when use length unit such as m、mm etc.
Overload	1.5 times of Full scale
Measuring Medium	Liquid which applicable with the contact material
Output Signal	RS485
Power Supply	3.1~8 VDC
Power consumption	Standby current <5uA Date collection cycle 0~65535s Power Consumption: About 200uA with data collection cycle as 1s About 70uA with data collection cycle as 3s About 50uA with data collection cycle as 5s ... Note: Longer data collection cycle, lower consumption
Accuracy	±0.5%FS
Long term stability	±0.25%FS/year
Medium temperature	-40~85℃
Ambient Temperature	-40~85℃
Storage Temperature	-40~85℃
Protection grade	IP68
Compensated Temperature	-10~70℃(Other measurement range); 0~60℃ (Range ≤1mH ₂ O)
Zero-point temperature drift	±1.5%FS(reference 30℃, within compensated temperature range); ±2.0%FS(Measurement Range ≤1mH ₂ O)
Full scale point temperature drift	±1.5%FS(reference 30℃, within compensated temperature range); ±2.0%FS(Measurement Range ≤1mH ₂ O)
Reverse polarity protection	No damage. Product will not work.
EMC	Compliance EN 61326
Vibration	20g(20~5000Hz)
Shock	20g(11ms)
Insulation resistance	>100MΩ @500VDC
Insulation strength	Apply 500VAC 50Hz test voltage, no breakdown or arcing for 1 minute.


Structure Drawings (Unit: mm)

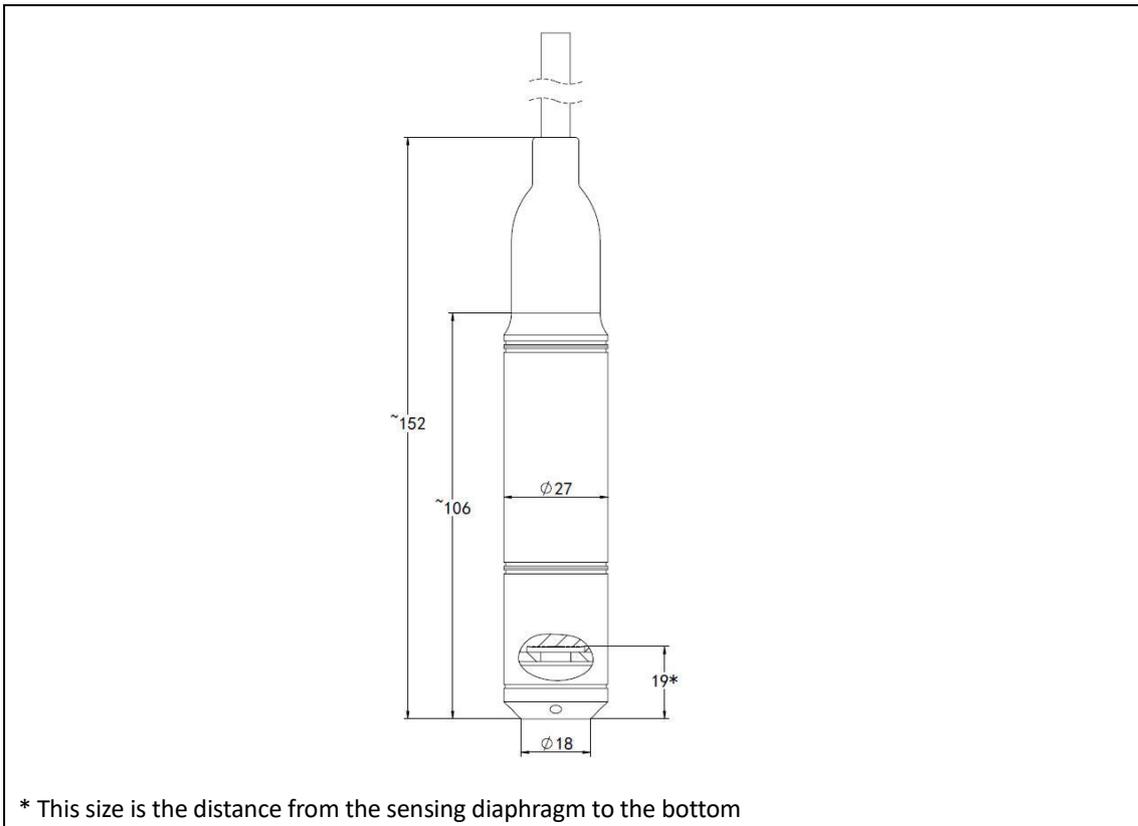

Material

Code	Part	Note
S4	Displacer part	304
S6		316L
T1		titanium alloy
M1	Pressure sensor	Silicon Piezoresistive, 316L
FK	O ring	FKM (working temperature: -20 ~ 200°C)
NB		NBR (working temperature: -40 ~ 120°C)
C2U	Cable	PU, external diameter (7.2±0.2) mm
C2N		NBR, external diameter (7.2±0.2) mm
C2F		Fluoroplastic cable, external diameter (7.2±0.2) mm
M	Filter cap	Metal Material
P		Plastic material

Electrical Interface



! Gauge product needs to take atmosphere pressure as reference, please keep vent-plug dry and do not take down it.

Electrical Connection

Output signal	Four wires Modbus-RTU/RS485			
Definition	Supply+(+V)	Supply-(-V)	RS485A	RS485B
Color	Red	Black	Yellow	Green

Ordering Guide

Model No.	Type							
HPM410LR	Low Power Consumption Level Transmitter							
	Range	Measurement Range						
	(0 ~ X)mH ₂ O (Ln)	X is the level range Ln is the cable length						
		Code	Output Signal					
		B7	RS485					
			Code	Cable				
			C2N	NBR cable				
			C2U	PU cable				
			C2F	Fuoroplastics cable				
			Code	Pressure Sensor				
			M1	silicon piezoresistive, 316L				
			X	Other customized requests				
				Code	Probe Material			
				S4	304			
				S6	316L			
				T1	titanium alloy			
					Code	Others		
					NB	NBR sealing ring		
					FK	FKM sealing ring		
					QF	Factory report		
						Other customized requests		
eg:HPM410LR	(0 ~ 1)mH ₂ O (L2)	B12	C2N	M1	S4	NB		

Certification Information

Factory certification	
Certification organization	CQM
Quality management system	ISO 9001:2015
Certification scope	Research, development and manufacture of pressure transmitter and temperature transmitter
Certificate No.	00223Q21711R1S